



SoundClick

Underlay

Lightweight underlay for click vinyl flooring, with anti-slip top surface.

- No slip-ups with the floor**
 SoundClick has an anti-slip top surface, which holds the flooring firmly in place. It makes it so much easier to fit, without the pieces sliding around. And when the floor is down, you can guarantee it won't be going anywhere – even if it takes the full force of family use!
- Quietly does it...**
 The dense, closed cell polyolefin foam of SoundClick gives it 18dB sound reduction – so it deadens any loud noise and makes the whole room quieter.
- That warm feeling**
 SoundClick has an ultra low tog value of just 0.27, which means your underfloor heating system works much more efficiently, keeping your floor lovely and warm!

Technical Data

Properties	Unit	Value	Test Method
Thickness of the underlay measured at 100 Pa pre-load	mm	1.5 ± 10%	EN 823
Impact Sound Reduction under 4mm Click	dB	≥ 18	ISO 140 - 717
Compressive strength			
• CS0.2: tested at 0.2 mm compression under 100 Pa pre-load	kPa	≥ 200	DIN EN 826
• CS0.2: tested at 0.5 mm compression under 100 Pa pre-load	kPa	≥ 400	DIN EN 826
Compressive creep under long term static load			
• max. thickness loss of ≤ 0.2 mm extrapolated to 10 years	kPa	≤ 40	EN 1606
Dynamic load			
• number of load cycles at max. deformation ≤ 0.2 mm	no. of cycles	≥ 1 Mio	EN 13793
• alternating cycles from min = 100 Pa to max = 70 kPa			
Punctual conformability to even out unevenness of subfloor	mm	0.7	FprCEN TS 16354
Thermal resistance at 24°C mean temperature	m ² k/W	0.027	EN 12667 / EN 12664
Water vapour diffusion resistance of the complex	m	≥ 80	EN 12667 / EN 12086
• diffusion-equivalent air layer thickness, SD-value			
Water absorption by foam	Vol%	< 1	DIN53571
Fire classification (reaction to fire)	Class	Efl	EN ISO 11925-2

QA Flooring Solutions Ltd


Block H, Pickering's Road,
 Widnes, Cheshire WA8 8XW
 Tel: 0151 495 3434
 Fax: 0151 420 9062
 Email: sales@qaflooringsolutions.com
www.qaflooringsolutions.com

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


Simply Better

Heavy Traffic

Click Vinyl

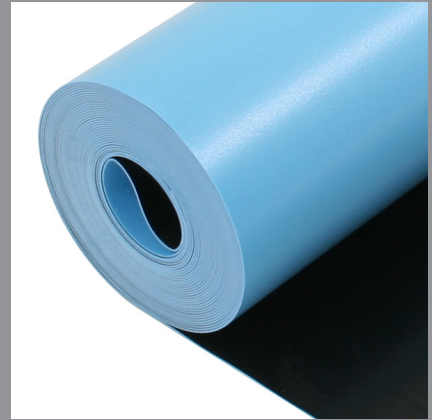

Best for

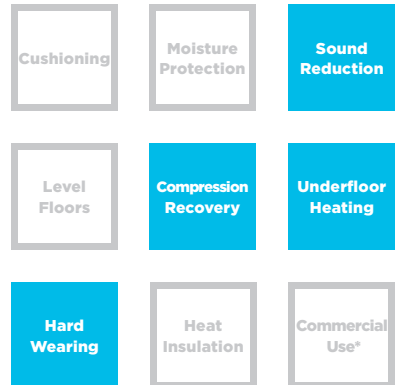

*Suitable for hotels and public buildings

Available in

Code	QAU-SCL-01
Size	1m x 15m (15m ²)
Thickness	1.5mm